


CIVIK staircases are characterized by a landing which allows the staircases to be fitted to openings of any shape or size. CIVIK has an adjustable height of between 252 and 305 cm.



The **direction of rotation**, whether clockwise or anti-clockwise, can be decided during the installation.

The **diameters** of the staircase are 120, 140 and 160 cm.

The recommended **ceiling aperture** is at least **5 cm** larger than the diameter of the staircase.

Example :

Ø staircase **120 cm** = Ø aperture **125 cm**.




NO OPENING



ROUND OPENING



SQUARE OPENING

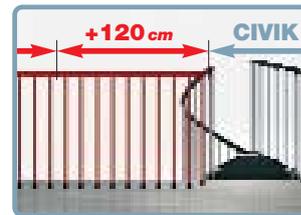


If you add or subtract rises to the staircase, you must purchase supplementary 82 cm **COLUMN** modules (Tab.3).

If you add two or more rises to the staircase, you must purchase supplementary 120 cm **HANDRAIL** modules (Tab.3).

The supplementary **BALUSTRADE** is necessary to protect the upper floor aperture. It comes in 120 cm modules comprising 10 balusters, handrail and fixings.

The balustrade can also assume a circular shape.

By purchasing one or more supplementary **RISES**, the height of the staircase can reach 376 cm. Supplementary rises consist of structure, tread and balusters.

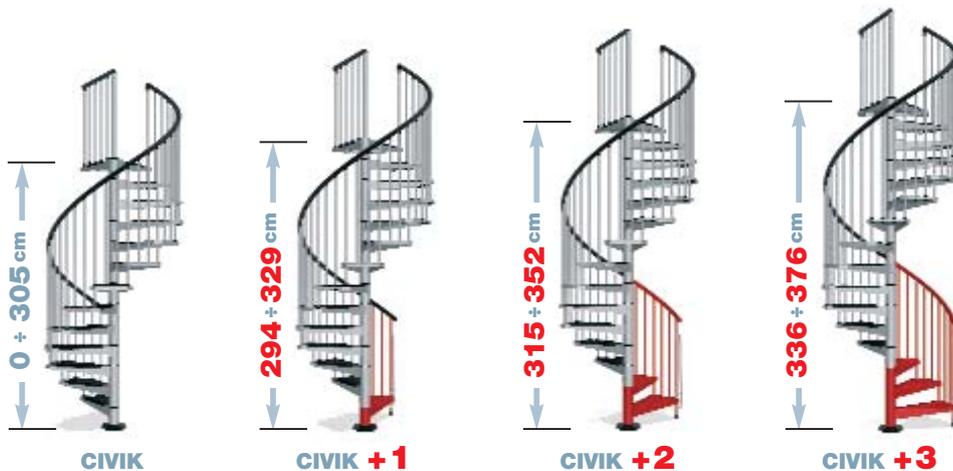

CIVIK HEIGHTS and supplementary items

TABLE NO.3 The measurements are in cm

CIVIK STAIRCASE + **SUPPLEMENTARY ITEMS**



STAIRCASE HEIGHT	N° RISES		+ N° RISES	+ N° COLUMNS	+ N° HANDRAILS	+ N° BALUSTRADES
From 210 to 235	(13 - 3) = 10	+		1*		
From 231 to 258	(13 - 2) = 11	+		1*		
From 252 to 282	(13 - 1) = 12					
From 273 to 305	CIVIK = 13					
From 294 to 329	(13 + 1) = 14	+	1			
From 315 to 352	(13 + 2) = 15	+	2	2*	1	
From 336 to 376	(13 + 3) = 16	+	3	1	1	

Rise adjustable from 21 to 23.5 cm

* Replaces the existing 125 cm column in the CIVIK staircase.



Civik, the colors of the steel.



Example:

if you wish to purchase CIVIK made up of **13 + 3 = 16** rises, as in the diagram on the left, you will need the following items:

- 1 CIVIK staircase
- + 3 Rises
- + 1 82 cm column
- + 1 Handrail

