

**Manufacturer**

Solidarietà Intrapresa Soc. Coop. sociale - O.N.L.U.S.  
Via Campo dei Fiori, 3/B - 47122 Forlì (FC)  
ITALIA

**Product**

**C20 STAIRCASE KIT**

Compliance N° 13/0877

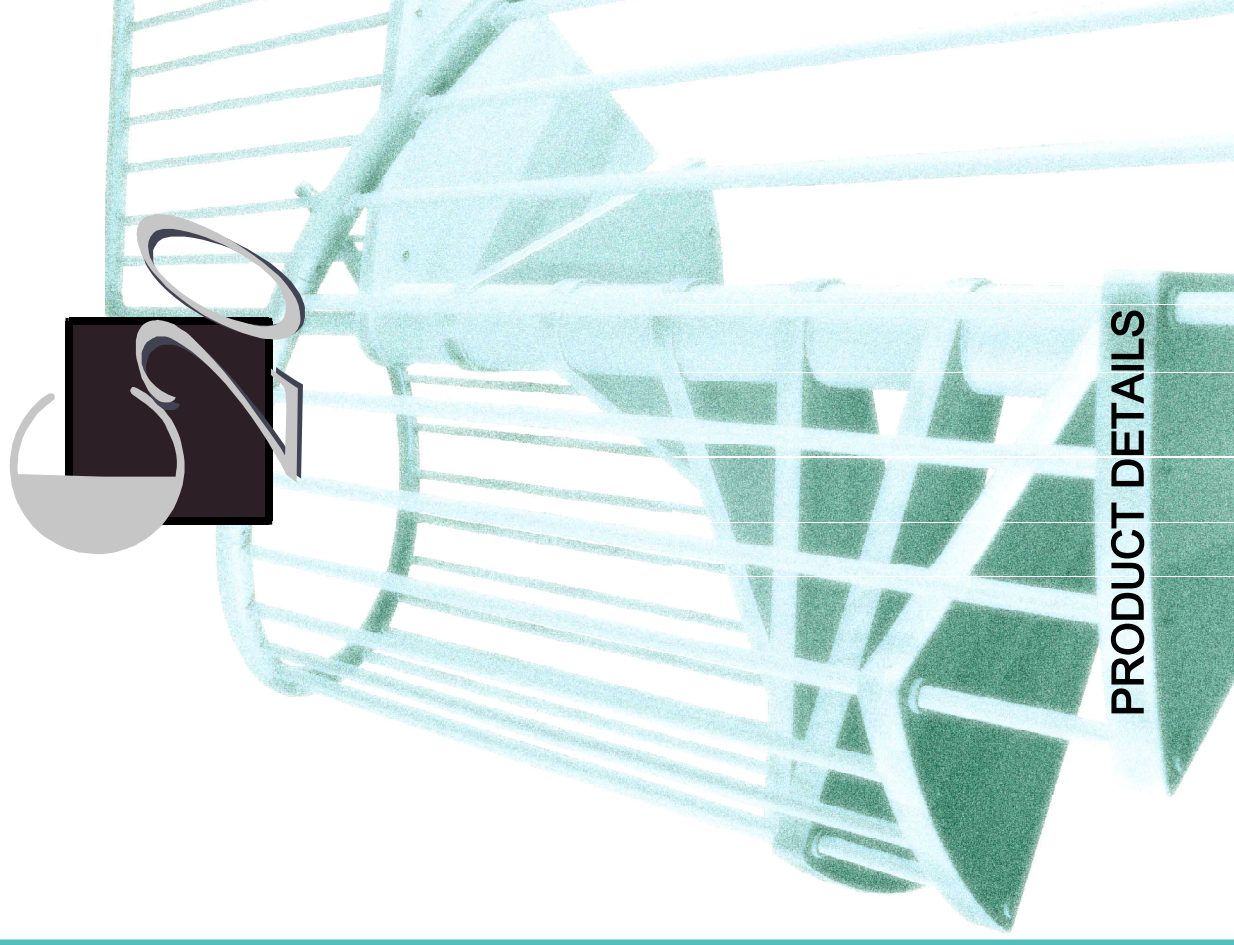
Year: 2013

Reference Terms : ETAG 008 01 Edizione gen. 2002


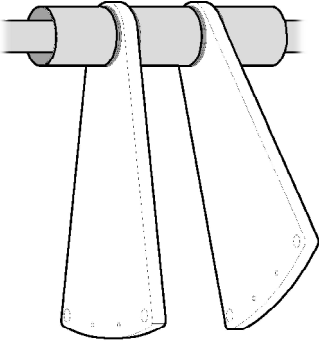
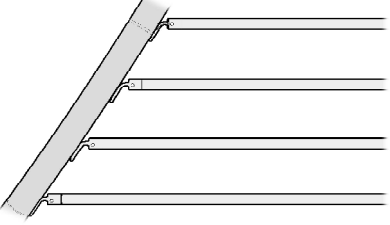
Served System N°: 0970

**CE**

**Dealer**



# PRODUCT SPECIFICATIONS

TREADS	STRUCTURE	RAILING	LEGISLATION	GENERAL INFO
<p><b>Description</b></p> <p>Tread realised with folded metal sheet welded with steel tubular</p> <p><b>Material</b></p> <p>Wood: dehydrated finger joint beech with 40mm thickness staves joined with vinyl adhesive.</p> <p><b>Surface Treatment</b></p> <p>Wood: double layer of proper transparent varnish treatment. For coloured version the colouring is applied in advance</p> 	<p><b>Description</b></p> <p>Structure realised with treads and spacers inserted between tubular and fixed on a plastic flange within a compression stay rode inside</p> <p><b>Material</b></p> <p>Steel: S235JREN10027/2 Plastic: Polyamide</p> <p><b>Surface Treatment</b></p> <p>Wood: double layer of proper transparent varnish treatment. For coloured version the colouring is applied in advance</p> <p>Steel: varnished with epoxy-polyester powders</p> 	<p><b>Description</b></p> <p>Vertical newels circular cross-section fixed to treads and to the handrail using plastic junctions</p> <p><b>Material</b></p> <p>Wood: Solid Beech Steel: S235JREN10027/2 Plastic: polyamide</p> <p><b>Surface Treatment</b></p> <p>Wood: double layer of proper transparent varnish treatment. For coloured version the colouring is applied in advance</p> <p>Steel: varnished with epoxy-polyester powders</p> 	<p><b>UNI 10959-01</b></p> <p>Spiral Staircases, mechanical stress resistance</p> <p><b>UNI 10803-99</b></p> <p>Terminology And Classification</p> <p><b>PRECAUTIONS NOTES</b></p> <p>Product must be located inside building belonging to "A" EN 1990:2002 category with a temperature between +5°C and +30°C, humidity must be between 30% and 70%</p> <p>Installation must be executed by experts checking the walls conditions in which appropriate anchoring has to be made.</p> <p>No one alteration to the product is allowed in order to avoid the stability compromising. Surfaces treatments can change the tone and colour if exposed to direct sunlight.</p> <p>The product should be kept away from direct heat sources.</p>	<p><b>Maintenance:</b></p> <p>Check the proper tightening of the nuts and bolts once the staircase is been installed. This check must be executed again 6 month after the installation.</p> <p><b>Cleaning:</b></p> <p>Normal cleaning of wood and plastic surfaces must be done using humid rag exclusively with water, do not use abrasive or solvent products.</p> <p>Metal parts can be cleaned with a humid rag using commercial products for furniture cleaning with no acid or strong solvent chemical substances</p> <p><b>Disposal:</b></p> <p>The product and every packaging element are realised using recyclable materials, all parts and components must not wasted into the environment, but they have to be carried to the local disposal system, regarding the regulations in force.</p>