STYLE SMART



KLOE' staircases are characterized by a landing which is adaptable during the installation to openings of any shape or size. KLOE' has an adjustable height between 253 and 306 cm.



The **direction of rotation**, whether clockwise or anti-clockwise, can be decided during the installation.

The **diameters** of the staircase are 120, 140 and 160 cm.

The recommended **ceiling aperture** is at least **5** cm larger than the diameter of the staircase. *Example*:

 \emptyset staircase **120** cm = \emptyset aperture **125** cm.



NO OPENING




ROUND OPENING



SQUARE OPENING

By purchasing one or more supplementary **RISES**, the height of the staircase can reach 377 cm
Supplementary rises consist of structure, tread and balusters.

If you add or subtract rises to the staircase, it is necessary to purchase supplementary 82 cm **COLUMN** modules *(Tab.2)*.



If two or more rises are added to the staircase it will be necessary to purchase supplementary 120 cm **HANDRAIL** modules *(Tab.2)*.

If two or more rises are added to the staircase it will be necessary to purchase supplementary **CABLE**. It is in stainless steel and measures 11 meters.

The supplementary **BALUSTRADE** is necessary to protect the upper floor aperture. It comes in 120 cm scalable modules comprising 5 balusters, cables, handrail and fixings.

The balustrade can also assume a circular shape.












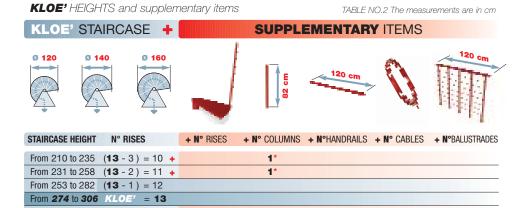

From 338 to 377 (**13** + 3) = 16 **+ Rise** adjustable from 21 to 23.5 cm

From 296 to 330 (13 + 1) = 14 +From 317 to 353 (13 + 2) = 15 +



Kloè, the colors of the steel and the shades of the wood.







2

3







WHITE / LIGHT

GREY / LIGHT

BLACK / LIGHT

WHITE / DARK

GREY / DARK

BLACK / DARK

Example:

if you wish to purchase KLOÈ made up of 13 + 3 = 16 rises, as in the diagram on the left, you will need the following items:

- 1 KLOE' staircase
- + 3 Rises
- + 1 82 cm column
- + 1 Handrail
- + 1 Cable



^{*} Replaces the existing 125 cm column in the KLOE'staircase.