

PRODUCT DETAILS

Manufacturer

Solidarietà Intrapresa Soc. Coop. sociale - O.N.L.U.S.
Via Campo dei Fiori, 3/B - 47122 Forlì (FC)
ITALIA

Product

F20 STAIRCASE KIT

Compliance N° 13/0878

Year: 2013

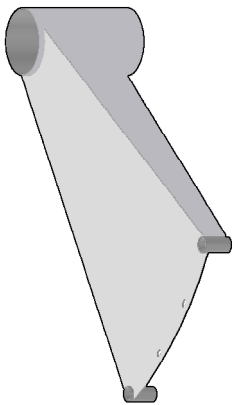
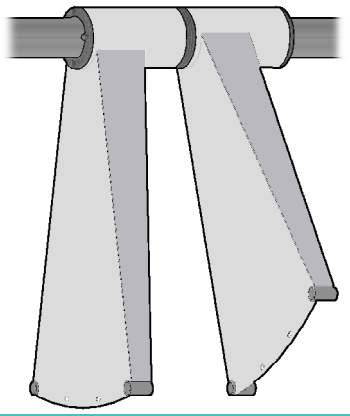
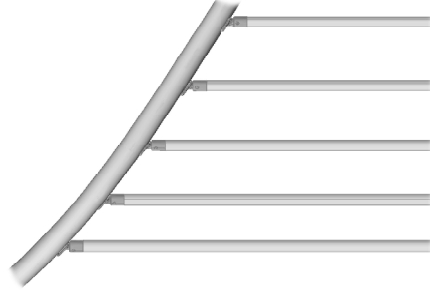
Reference Terms :ETAG 008 01 Edizione gen. 2002

Served System N° 0970

CE

Dealer

PRODUCT SPECIFICATIONS

TREADS	STRUCTURE	RAILING	LEGISLATION	GENERAL INFO
<p>Description Tread realised with folded metal sheet welded with steel tubular</p> <p>Material: Steel: S235JREN10027/2</p> <p>Surface Treatment Steel: cataphoresis treatment, primer and final varnishing with epox-polyester powders</p> 	<p>Description Structure realised with treads and spacers inserted between tubular and fixed on a plastic flange within a compression stay rode inside</p> <p>Material: Steel: S235JREN10027/2 Plastic: Polyamide</p> <p>Surface Treatment Steel: cataphoresis treatment, primer and final varnishing with epox-polyester powders</p> 	<p>Description Vertical newels circular cross-section fixed to treads and to the handrail using plastic junctions</p> <p>Material: Steel: S235JREN10027/2 Plastic: Polyamide</p> <p>Surface Treatment Steel: cataphoresis treatment, primer and final varnishing with epox-polyester powders</p> 	<p>UNI 10959-01 Spiral Staircases, mechanical stress resistance</p> <p>UNI 10803-99 Terminology And Classification</p> <p>PRECAUTIONS NOTES</p> <p>Product must be located inside building belonging to "A" EN 1990:2002 category with a temperature between +5°C and +30°C, humidity must be between 30% and 70%</p> <p>Installation must be executed by experts checking the walls conditions in which appropriate anchoring has to be made.</p> <p>No one alteration to the product is allowed in order to avoid the stability compromising. Surfaces treatments can change the tone and colour if exposed to direct sunlight. The product should be kept away from direct heat sources.</p>	<p>Maintenance: Check the proper tightening of the nuts and bolts once the staircase is been installed. This check must be executed again 6 month after the installation.</p> <p>Cleaning: Normal cleaning of wood and plastic surfaces must be done using humid rag exclusively with water, do not use abrasive or solvent products. Metal parts can be cleaned with a humid rag using commercial products for furniture cleaning with no acid or strong solvent chemical substances</p> <p>Disposal: The product and every packaging element are realised using recyclable materials, all parts and components must not wasted into the environment, but they have to be carried to the local disposal system, regarding the regulations in force.</p>