T20 SPACESAVER STAIRCASE :: PRODUCT GUIDE

The T20 Spacesaver Staircase from D'Opera, leading Italian staircase manufacturer. An innovative, patented design features triangular treads in powder coated steel set in a mirrored layout to produce a staircase which takes up about half the space of a regular format staircase.



The tread rise is adjustable from 210mm to 220mm (to UK Building Regulations) although it is designed to have a tread rise of up to 230mm. The tread going is a maximum of 240mm.






11 Risers



12 Risers

13 Risers


Define your T20 staircase kit step-by-step





1) Measure your stairwell dimensions

(Please, consider your minimum stairwell dimension is 1300X700mm with 320mm as maximum slab thickness "S")



The minimum stairwell opening size is 1300mm x 700mm! 2) Define the kit which suits your case, using the "RISER TABLE" below, based on your total height (HT)

The "RISER TABLE" defines the riser height to be used during your staircase assembly, based on your total height "HT"

| Т20 | Total | RISERS height | | | | |
|------------------------|-------|---------------|----------|--------|--------|------------------------|
| | HT | 210 | 215 | 220 | 225 | 230 |
| | 2520 | 12 | | | 2 | 9 11 |
| | 2530 | 10 | 2 4 | | | 11 |
| | 2540 | 8 6 4 | 4 | | | |
| | 2550 | 6 | 6 | | | |
| 11 treads 12 risers | 2560 | 4 | | | | |
| | 2570 | 2 | 10 | | | |
| | 2580 | | 12 | | | |
| | 2590 | | 12 10 | 2 | | |
| | 2600 | | 8 | 4 | | |
| | 2610 | | 6 | 6 | | |
| | 2620 | | 4 | 8 | | |
| | 2630 | | 4 | 10 | | |
| | 2640 | | - | 12 | | |
| | 2650 | | | 10 | 2 | |
| | 2660 | | | 8 | 4 | |
| | 2670 | | | 6 4 | 6 8 | |
| | 2680 | | | 4 | 8 | |
| | 2690 | | | 2 | 10 | |
| | 2700 | | | | 12 | |
| | 2710 | | | | 10 | 2 |
| | 2720 | | | | 8 | 4 |
| | 2730 | 13 | | | 6 | 2 4 6 8 10 |
| | 2740 | 11 | 2 | | 4 2 | 8 |
| | 2750 | 9 | 2 | | 2 | 10 |


3) Verify that your staircase footprint fits into your stairwell dimensions

T20 11

Straight staircase 11 treads 12 risers Total height (HT) min.2520 max.2760

T20 12 Straight staircase 12 treads 13 risers Total height (HT) min.2730 max.2990

T20 13 Straight staircase 13 treads 14 risers Total height (HT) min.2940 max.3220

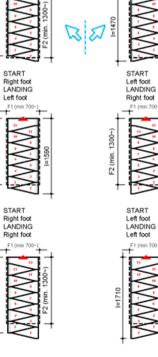

(The seguential positioning of the treads takes place

START

Left foot LANDING

Left foot


during assembly)

START

Right foot LANDING


Right foot

Define your T20 staircase kit step-by-step

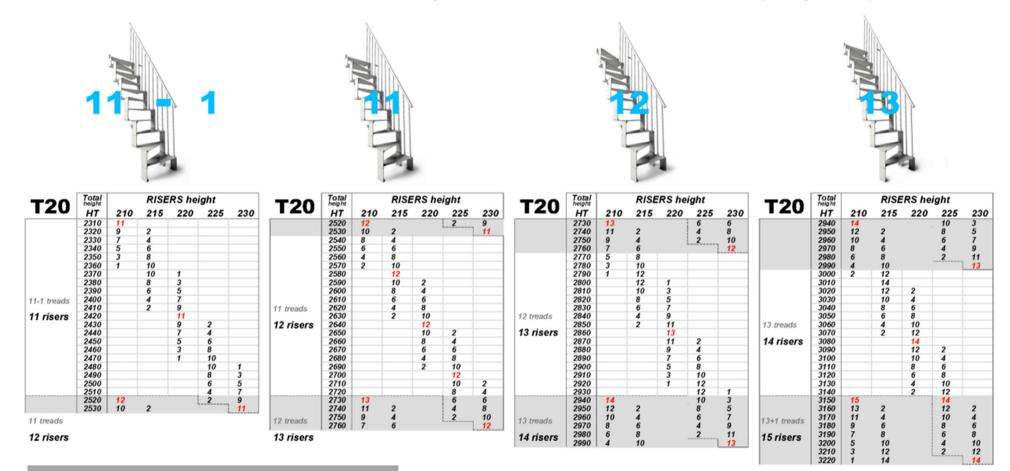

N.B. It is your responsibility to ensure that any Local Authority approvals necessary have been obtained. This will vary according to your application and we advise you to always check before going ahead with your purchase. Matching balustrading kits are available for around the stairwell opening on the upper floor. The stairwell balustrade kit is supplied in lengths of 1500mm. Calculate the number of kits required for your project.

The perfect finishing touch!

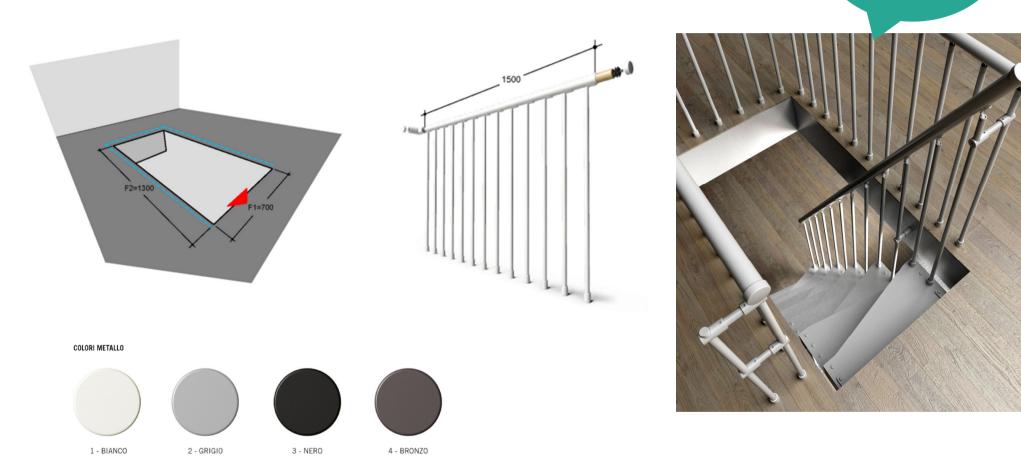

The T20 Spacesaver Stair is available in four colour options – White, Grey, Black and Bronze.